


## Crossarm Pin

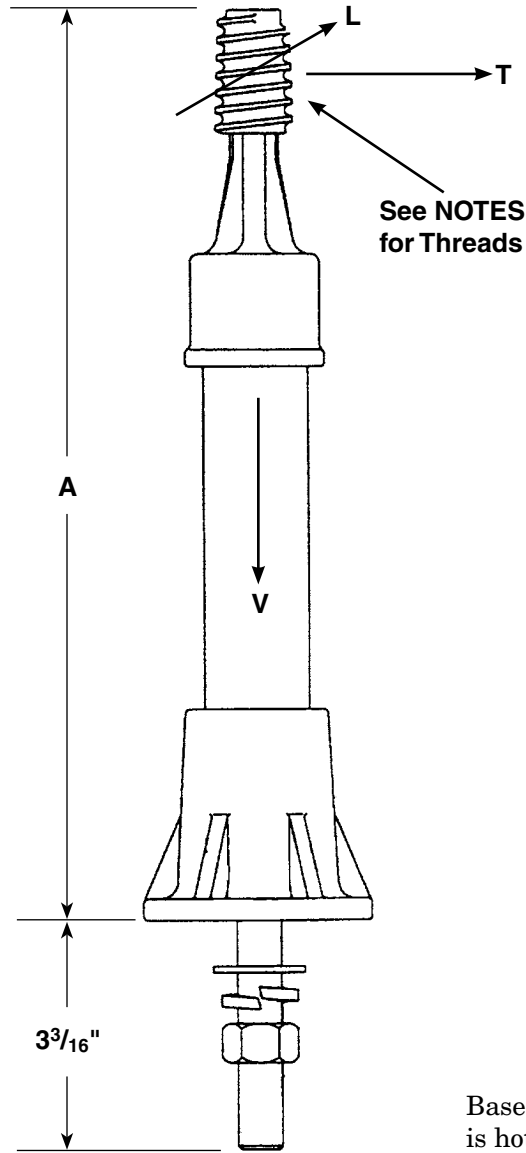

Base is Aluminum Alloy and Ferrule is hot-dip-galvanized ductile iron.

Catalog Number	Length A	Minimum Ultimate*			Weight (Each)
		Vertical V	Longitudinal L	Transverse T	
<b>Medium Duty 1.5" (38 mm) Dia. Rod</b>					
1XPM131	13" (33 cm)	2500 lbs. (1125 kg)	1200 lbs. (540 kg)	1200 lbs. (540 kg)	2.4 lbs. (1.1 kg)
1XPM181	18" (45.7 cm)	2500 lbs. (1125 kg)	1000 lbs. (450 kg)	1000 lbs. (450 kg)	2.9 lbs. (1.3 kg)

\*Recommended maximum working load is 50% of minimum ultimate ratings listed.

**NOTES:**

*1XPM—1 series has 1" plastisol coated threads.*

*For 1" Lead threads, replace the last "1" in number with "3".*

*For 1.375" Lead threads, replace the last "1" in number with "4".*

*Add "5" suffix for 5" mounting bolt.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.



210 N. Allen St. • Centralia, MO 65240

©Copyright 2010 Hubbell Incorporated

Printed in USA

RGS 2M 9/11