


**DESIGN CHARACTERISTICS**

LEAKAGE DISTANCE	33 IN.
60 Hz DRY FLASHOVER	200 KV
60 Hz DRY WITHSTAND	170 KV
60 Hz WET FLASHOVER	160 KV
60 Hz WET WITHSTAND	130 KV
IMPULSE CRITICAL POSITIVE	325 KV
IMPULSE CRITICAL NEGATIVE	360 KV
MAX. RIV AT 1000 kHz	10 μV
RIV TEST VOLTAGE	30 KV
POWER ARC	150 kA CYCLES
NET WEIGHT	3.3 LBS
TENSION PROOF TEST	10000 LBS
ULTIMATE TENSION STRENGTH	15000 LBS
NO. OF WEATHERSHEDS	8

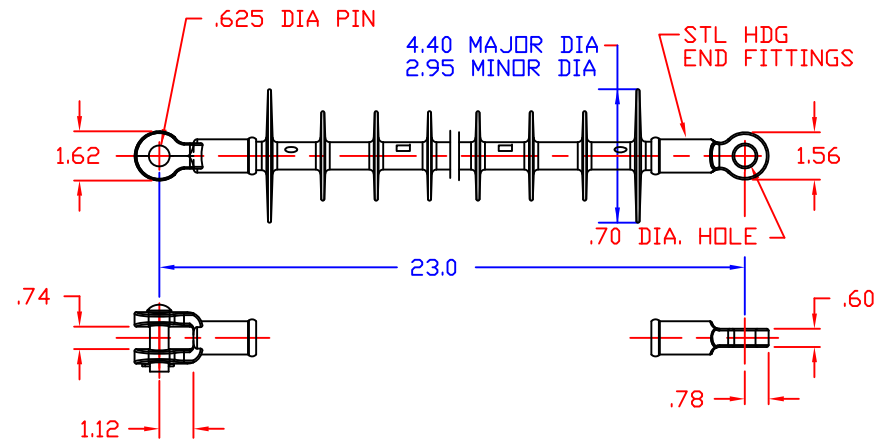

**DESIGN CHARACTERISTICS**

LEAKAGE DISTANCE	37.6 IN.
60 Hz DRY FLASHOVER	195 KV
60 Hz DRY WITHSTAND	180 KV
60 Hz WET FLASHOVER	175 KV
60 Hz WET WITHSTAND	155 KV
IMPULSE CRITICAL POSITIVE	360 KV
IMPULSE CRITICAL NEGATIVE	365 KV
MAX. RIV AT 1000 kHz	10 μV
RIV TEST VOLTAGE	30 KV
POWER ARC	150 kA CYCLES
NET WEIGHT	3.3 LBS
TENSION PROOF TEST	10000 LBS
ULTIMATE TENSION STRENGTH	15000 LBS
NO. OF WEATHERSHEDS	10

	<b>HUBBELL POWER SYSTEMS</b>			
	TITLE PDI-35			
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	SIZE S	DWG NO. --	CAT / PART / ASSY NO. 401035-0215	REV 0
	DO NOT SCALE THIS DRAWING	DRN BY MKTING	DATE 12/16/10	SHEET 1 OF 1

	<b>HUBBELL POWER SYSTEMS</b>			
	TITLE PDI-46/DS-46			
CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.	SIZE S	DWG NO. --	CAT / PART / ASSY NO. 401046-0215	REV 0
	DO NOT SCALE THIS DRAWING	DRN BY MKTING	DATE 12/16/10	SHEET 1 OF 1