


ANDERSON™

SPLIT BOLT CONNECTORS



**New! Full Standard Series:
Copper and Copper-Aluminum**

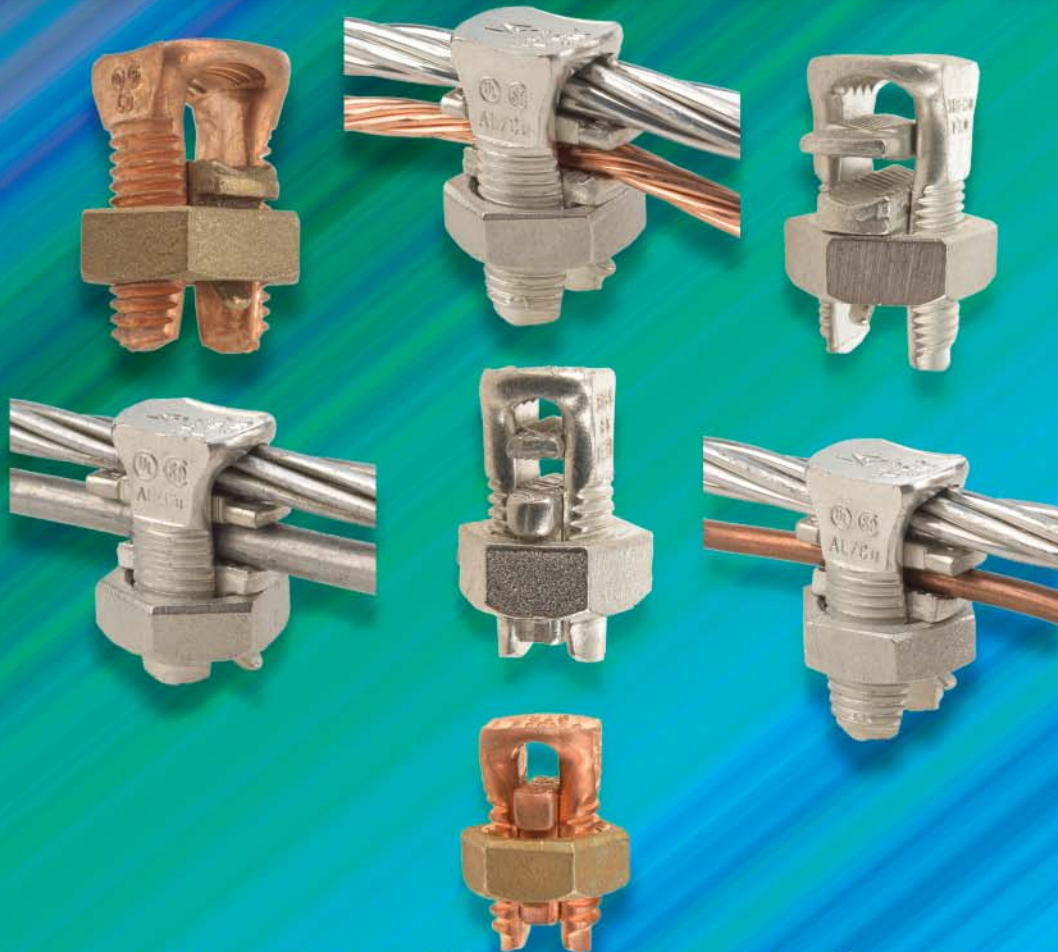

**POWER
SYSTEMS**

E-mail: hpsliterature@hps.hubbell.com
Web: www.hubbellpowersystems.com

ANDERSON® CHANCE® FARGO® HUBBELL® OHIO/BRASS®

210 N. Allen St., Centralia, MO 65240 • Phone: 573-682-5521 • fax: 573-682-8714

Note: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

© 2005 Hubbell Power Systems, Inc.

BULLETIN AE-2017 WB

New Anderson Split Bolts: Easy to specify, Easy to Use

Copper Alloy Split Bolts

For Copper and Copperweld Conductors

		< MAIN Range >		< TAP Range >	
		w/2 Same Conductors		w/Max main	
		Min size	Max size	Min tap	
Prior Anderson Series	New Anderson Catalog Number	All sizes shown STRANDED unless noted; 2 conductors maximum			
C8	SBN8	10	8	16	
C6	SBN6	8	6*	16	
C4	SBN4	8	4	14	
C2	SBN2	6	2	14	
C1	SBN2	6	2	14	
C1/0	SBN10	4	1/0	14	
C2/0	SBN20	2	2/0	14	
C3/0	SBN30	1	3/0	8	
C4/0	SBN250	1	250	8	
C350	SBN350	2/0	350	1/0	
C500	SBN500	300	500	2/0	
C-750	C-750	350	750	8	
C-1000	C-1000	500	1000	8	

* Solid Conductor

Competitive Cross Reference (Not all ranges exactly equivalent)

Bundy Cross	Blackburn Cross	Penn Union Cross
KS15	8H	S-8
KS17	6H	S-6
KS20	4H	S-4
KS22	1H	S-3
KS23	2H	S-2
KS25	10H	S-1/0
KS26	20H	S-2/0
KS27	30H	S-3/0
KS29	40H	S-4/0-250
KS31	350M	S-350
KS34	500M	S-500
KS39	750M	S-750
KS44	1000M	S-1000

Tin Plated Copper Alloy Split Bolts w/ Separator Bar

For Copper to Copper and Aluminum to Copper Connections

		< MAIN Range >		< TAP Range >	
		w/ 2 Same Conductors		w/Max main	
		Min size	Max size	Min tap	
Prior Anderson Series	New Anderson Catalog Number	All sizes shown STRANDED unless noted; 2 conductors maximum			
CPS6	SBS6	8	6*	14	
CPS4	SBS4	8	4	10	
CPS1	SBS2	6	2	14	
CPS2	SBS2	6	2	14	
CPS1/0	SBS10	4	1/0	10	
CPS2/0	SBS20	2	2/0	8	
CPS3/0	SBS30	1	3/0	8	
CPS4/0	SBS250	1	250	8	
CPS350	SBS350	2/0	350	1/0	
CPS500	SBS500	300	500	2/0	

with
ACSR Main
(single core)

#1
1/0
2/0
4/0
336
477


Competitive Cross Reference (Not all ranges exactly equivalent)

Bundy Cross	Blackburn Cross	Penn Union Cross
KSU17	6HPS	SW-3
KSU20	4HPS	SW-4
KSU22	2HPS	SW-5
KSU23	1HPS	SW-6
KSU25	10HPS	SW-7
KSU26	20HPS	SW-8
KSU27	—	SW-9A
KSU29	40HPS	SW-10
KSU31	350HPS	SW-11
KSU34	500HPS	SW-12

* Solid Conductor

Copper Alloy Split Bolts


TECHNICAL SPECIFICATIONS

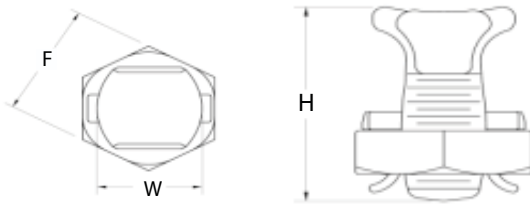

New Anderson Catalog Number	Cross Flats "F" (Wrench)	Recommended Torque (inch-pounds)	Width "W" Inches	Height "H" Inches	Weight Each in		Inner Pack Quantity	Weight Each in	
					Lbs.	(Kg)		Lbs.	(Kg)
SBN8	9/16"	80	.47	.85	0.038	(0.017)	100	3.80	(1.72)
SBN6	5/8"	165	.49	.91	0.044	(0.020)	100	4.40	(2.00)
SBN4	13/16"	165	.71	1.16	0.075	(0.034)	100	7.50	(3.40)
SBN2	7/8"	275	.75	1.25	0.094	(0.043)	80	7.52	(3.41)
SBN2	7/8"	275	.75	1.25	0.094	(0.043)	80	7.52	(3.41)
SBN10	15/16"	385	.79	1.54	0.144	(0.065)	50	7.20	(3.27)
SBN20	1-1/16"	385	.87	1.69	0.188	(0.085)	25	4.70	(2.13)
SBN30	1-1/4"	500	1.10	2.09	0.300	(0.136)	20	6.00	(2.72)
SBN250	1-3/8"	650	1.10	2.09	0.338	(0.153)	20	6.76	(3.07)
SBN350	1-1/2"	650	1.22	2.36	0.506	(0.230)	10	5.06	(2.30)
SBN500	1-3/4"	825	1.34	2.83	0.731	(0.332)	8	5.85	(2.65)
C-750	2-1/8"	1000	1.94	3.56	1.760	(0.798)	1	1.76	(0.80)
C-1000	2-1/8"	1100	2.25	4.03	2.800	(1.270)	1	2.80	(1.27)

Tin Plated Copper Alloy Split Bolts w/ Separator Bar

TECHNICAL SPECIFICATIONS

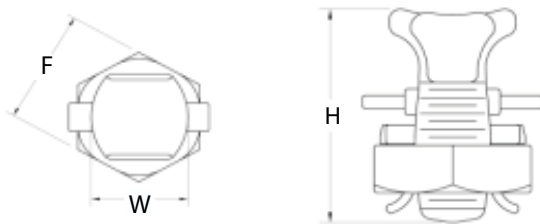

New Anderson Catalog Number	Cross Flats "F" (Wrench)	Recommended Torque (inch-pounds)	Width "W" Inches	Height "H" Inches	Weight Each in		Inner Pack Quantity	Weight Each in	
					Lbs.	(Kg)		Lbs.	(Kg)
SBS6	5/8"	165	.49	1.06	0.056	(0.025)	100	5.60	(2.54)
SBS4	13/16"	165	.71	1.24	0.094	(0.043)	80	7.52	(3.41)
SBS2	7/8"	275	.75	1.44	0.119	(0.054)	70	8.33	(3.78)
SBS2	7/8"	275	.75	1.44	0.119	(0.054)	70	8.33	(3.78)
SBS10	15/16"	385	.79	1.73	0.175	(0.079)	40	7.00	(3.18)
SBS20	1-1/16"	385	.87	1.71	0.212	(0.096)	25	5.30	(2.40)
SBS30	1-1/4"	500	1.10	2.13	0.350	(0.159)	20	7.00	(3.18)
SBS250	1-3/8"	650	1.10	2.22	0.388	(0.176)	15	5.82	(2.64)
SBS350	1-1/2"	650	1.22	2.56	0.600	(0.272)	10	6.00	(2.72)
SBS500	1-3/4"	825	1.34	2.95	0.850	(0.386)	6	5.10	(2.31)