

Class 2 Rubber Insulating Blankets

- Meet ASTM Standard Specification D1048
- For Class 2 (17kV Ø-Ø max. use)
- Type I (non-ozon-resistant)

Performance-designed material

Chance® Class 2 flexible blankets help protect workers from accidental contact with energized components during line maintenance.

Made of natural rubber, these blankets offer excellent performance properties in accordance with ASTM Standard Specification D1048. The special formulation will retain its excellent physical properties.



Versatile protection, maximum rating

Flexible to cover many irregular shapes, rubber blankets typically are used with conductor covers (flexible or rigid) on deadends, apparatus, secondary racks, poletop pins and crossarms.

For applications through 17kV phase-to-phase maximum, this Class 2 blanket design includes perimeter eyelets to accept Chance button C4060532 and most other buttons existing in the field. For details on buttons, clamp pins and storage cannisters, see Catalog page 2409.

Ordering Information

- Class 2 • Type I
- Proof Tested at 20kV AC rms
- Maximum Use: 17kV Ø-Ø

BLACK Solid Blankets

Catalog No.	Description	Weight
PSC4060607	36" x 36", 6 eyelets	6 ¹ / ₄ lb. (2.8 kg.)




Hot Stick Clamp
 Catalog No.
 C4060531

Eyes and special handle shape for easy placement by clampstick


Accessories

Catalog No.	Description	Weight
C4060530	Clamp Pin, Rubber Glove	1 lb. (.45 kg.)
C4060531	Clamp Pin, Hot Stick	1 lb. (.45 kg.)
C4060532	Button, Rubber Blanket	1/8 lb. (.06 kg.)
C4032998	*Storage Cannister, no handle	6 lb. (2.7 kg.)
C4032999	*Storage Cannister w/handle	7 ⁵ / ₈ lb. (3.43 kg.)

**For details, see Catalog Section 2500.*

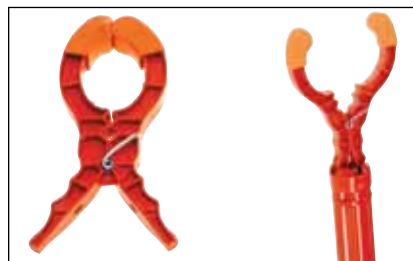

Rubber Glove Clamp
 Cat. No. C4060530
Special handle shape also fits clampstick for easy placement

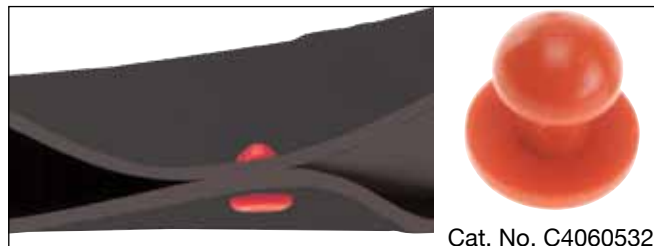

Cat. No. C4060532



210 North Allen Street
 Centralia, MO 65240 USA
 Phone: 573-682-5521
 Fax: 573-682-8714



NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.