




Aluminum Platforms

Shipped fully assembled for 2-pole mounting

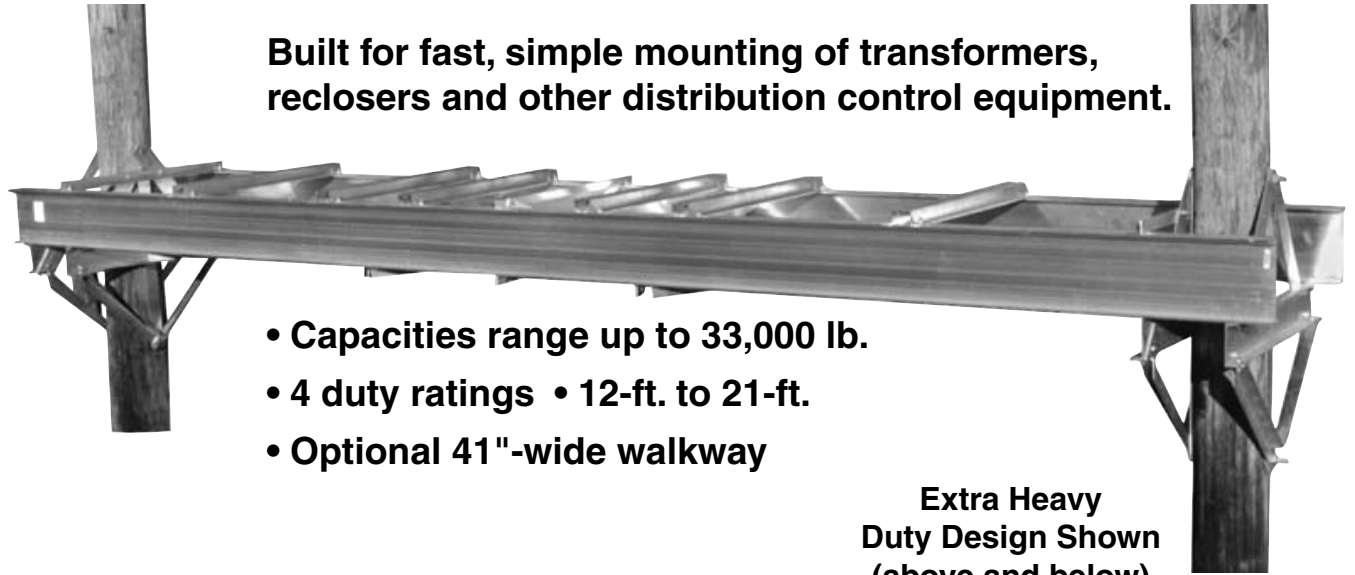

Built for fast, simple mounting of transformers, reclosers and other distribution control equipment.

- Capacities range up to 33,000 lb.
- 4 duty ratings • 12-ft. to 21-ft.
- Optional 41"-wide walkway

Extra Heavy Duty Design Shown (above and below)

For equipment too heavy for single-pole mounting, Hubbell Aluminum Platforms carry three relative ratings:

- Uniform vertical load
- Single center vertical load
- Three vertical loads

These criteria provide flexible information to match varying circumstances in the case-by-case process of specifying a platform. Since both weight and dimensions of equipment are factors, the same size specified for an individual item at one location may serve to support two to three items elsewhere.

To serve a wide range of uses, Hubbell offers a large selection. In the following four series, these lengths* are available at each increment of 2 feet:

- Regular Duty 12 to 16 feet*
- Heavy Duty 14 to 18 feet*
- Extra Heavy Duty 13 to 21 feet*
- Super Extra Heavy Duty 13 to 21 feet*

*Inside poles, face to face

Pre-assembly saves you time and money

All Hubbell platforms are delivered in an assembled state, ready for mounting. This saves \$200 to \$300 on average in labor per platform.

High-strength and walkway option for all sizes

All platforms are constructed with 11½" main I-beams (two each for all series but the Super Extra Heavy Duty series, which has four main beams each)., Extruded-aluminum sections are all 6061-T6 material. Fasteners are all steel galvanized per ASTM A153 or ASTM B695 Class 55.



Each platform has six adjustable hat-channel crossmembers that can slide to necessary positions and lockbolt in place.

All come with illustrated, detailed mounting instructions.

Each unit may be ordered with an optional 41-inch-wide parallel walkway with hand railing and supports. Planks are not included, must be provided by the customer.

For ordering information, see other side.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.

© Copyright 2006 Hubbell • 210 North Allen Street • Centralia, MO 65240

Aluminum Platforms

Shipped fully assembled for 2-pole mounting

Ordering Information

Catalog Number	Inside Poles, Face to Face	Beams, No. x Length	Vertical Load Ratings			Weight, each
			Uniform Vertical Load	Single Center Vertical Load	Three Vertical Loads	

Regular Duty Platforms — 42" WIDE — Each attaches by **four** 3/4" machine bolts (not supplied), **two** bolts in each pole.

CP122	12 feet	2 x 14 ft.	8,000 lb.	5,000 lb.	2,000 lb.	233 lb.
CP142	14 feet	2 x 16 ft.	6,000 lb.	4,000 lb.	1,800 lb.	254 lb.
CP162	16 feet	2 x 18 ft.	5,000 lb.	3,100 lb.	1,400 lb.	275 lb.

Walkway option for Regular Duty Platforms — For a single walkway (41 inches wide x length of platform beams) with supports and hand railings (walkway planks not supplied), **add to Catalog No. this suffix: WKY.**

Heavy Duty Platforms — 42" WIDE — Each attaches by **four** 3/4" machine bolts (not supplied), **two** bolts in each pole.

CPHD142	14 feet	2 x 16 ft.	14,000 lb.	7,500 lb.	4,600 lb.	265 lb.
CPHD162	16 feet	2 x 18 ft.	14,000 lb.	7,500 lb.	4,600 lb.	286 lb.
CPHD182	18 feet	2 x 20 ft.	14,000 lb.	7,500 lb.	3,633 lb.	307 lb.

Walkway option for Heavy Duty Platforms — For a single walkway (41 inches wide x length of platform beams) with supports and hand railings (walkway planks not supplied), **add to Catalog No. this suffix: WKY.**

Extra Heavy Duty Platforms — 42" WIDE — Each attaches by **six** 3/4" machine bolts (not supplied), **three** bolts in each pole.

CPEHD142	13 feet	2 x 16 ft.	22,000 lb.	10,000 lb.	6,220 lb.	409 lb.
CPEHD162	15 feet	2 x 18 ft.	17,742 lb.	10,000 lb.	4,667 lb.	430 lb.
CPEHD182	17 feet	2 x 20 ft.	13,813 lb.	8,633 lb.	3,700 lb.	451 lb.
CPEHD202	19 feet	2 x 22 ft.	11,058 lb.	6,911 lb.	2,909 lb.	471 lb.
CPEHD222	21 feet	2 x 24 ft.	9,052 lb.	5,657 lb.	2,381 lb.	503 lb.

Walkway option for Extra Heavy Duty Platforms — For a single walkway (41 inches wide x length of platform beams) with supports and hand railings (walkway planks not supplied), **add to Catalog No. this suffix: WKY.**

Super Extra Heavy Duty Platforms — 48" WIDE — Each attaches by **six** 3/4" machine bolts (not supplied), **three** bolts in each pole.

CPSEHD142	13 feet	4 x 16 ft.	33,000 lb.	20,000 lb.	10,400 lb.	665 lb.
CPSEHD162	15 feet	4 x 18 ft.	31,000 lb.	18,000 lb.	9,334 lb.	709 lb.
CPSEHD182	17 feet	4 x 20 ft.	27,626 lb.	17,266 lb.	7,266 lb.	751 lb.
CPSEHD202	19 feet	4 x 22 ft.	22,116 lb.	13,822 lb.	5,818 lb.	801 lb.
CPSEHD222	21 feet	4 x 24 ft.	18,104 lb.	11,314 lb.	4,762 lb.	856 lb.

Walkway option for Super Extra Heavy Duty Platforms — For a single walkway (41 inches wide x length of platform beams) with supports and hand railings (walkway planks not supplied), **add to Catalog No. this suffix: WKY.**

Platform Accessories

CATTDK	Equipment tie-down kit. Includes "L" tabs, bolts, washers and nuts for one piece of equipment
CPEPKRD	Extra pole kit for regular duty platform
CPEPKHD	Extra pole kit for heavy duty platform
CPEPKEHD	Extra pole kit for extra heavy duty platform
CPEPKSEHD	Extra pole kit for super extra heavy duty platform